
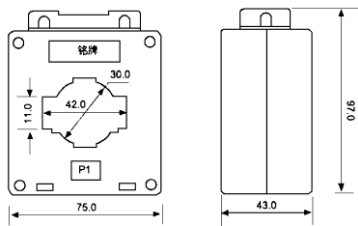







低压电流互感器（电力用）

产品特点

- ◆ 一次电流 5A~5000A，二次电流 5A，规格齐全，全面覆盖 0.2 级、0.5 级及 1 级三个准确度等级；
- ◆ 所用铁芯经过高真空热处理，性能优良，精度稳定；
- ◆ 外壳采用高抗冲阻燃 ABS 材料制成，具有良好的安全性能，造型美观；
- ◆ 结 构：穿孔式（圆、方孔），弯片、单片压盘安装方式；
- ◆ 安装方便，可采用弯片固定，压盘固定；
- ◆ 性能符合 GB1208—1997《电流互感器》技术标准。

产品规格（尺寸单位：mm）

HZBH0.66~30 I				
额定输入	5-200A	15A-300A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	5-25A...1.0% 30-200A...0.5%	15-120...1% 150-300...0.5%		
HZBH0.66~40 I				
额定输入	15~1000A	75-800A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	15-25A...1.0% 30-1000A...0.5%	75-120A...1.0% 150-800A...0.5%		
HZBH0.66~40 I I				
额定输入	50-1000A	150A~1500A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	50-1000A...0.5%	150-800A...0.5% 1000-1500A...0.2%		
HZBH0.66~60 I I				
额定输入	100-1500A	300-2000A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	100-1000A...0.5% 1200-1500A...0.2%	300-800A...0.5% 1000-2000A...0.2%		
HZBH0.66~100 I I				
额定输入	400-3000A	500-4000A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	100-1000A...0.5% 1200-3000A...0.2%	500-800A...0.5% 1000-4000A...0.2%		

HZBH0.66~120 I I				
额定输入	400-4000A	500-4000A		
额定输出	1A	5A		
上限电压	660V	660V		
准确度	400-1000A...0.5% 1200-3000A...0.2%	500-800A...0.5% 1000-4000A...0.2%		

主要技术参数(5A 输出)							
型号	额定电压	额定 电流比	额定 二次负荷	准确度 等级	母排		穿芯 匝数
					截面尺寸	根数	
HZBH0.66~30 I	0.66kV	15/5	2.5VA	1	30×10mm ²	1	6
		20/5	2.5VA	1			5
		25/5	2.5VA	1			4
		30/5	2.5VA	1			3
		40/5	2.5VA	1			3
		50/5	2.5VA	1			2
		60/5	2.5VA	1			2
		75/5	2.5VA	1			1
		100/5	2.5VA	1			
		150/5	2.5VA	0.5			
		200/5	5VA	0.5			
		250/5	5VA	0.5、0.5S			
		300/5	5VA	0.5、0.5S			
HZBH0.66~40 I	0.66kV	75/5	2.5VA	1	40×10mm ²	1	2
		100/5	2.5VA	1			1
		150/5	2.5VA	0.5			
		200/5	5VA	0.5			
		250/5	5VA	0.5			
		300/5	5VA	0.5			
		400/5	5VA	0.5			
		500/5	10VA	0.5			
		600/5	10VA	0.5			
		750/5	10VA	0.5			
		800/5	10VA	0.5			
HZBH0.66~40 II	0.66kV	150/5	2.5VA	0.5	40×10mm ²	1~2	1
		200/5	5VA	0.5			
		250/5	5VA	0.5			
		300/5	5VA	0.5			
		400/5	5VA	0.5			
		500/5	10VA	0.5			
		600/5	10VA	0.5			

		750/5	10VA	0.5			
		800/5	10VA	0.5			
		1000/5	15VA	0.2			
		1200/5	20VA	0.2			
		1500/5	20VA	0.2			
HZBH0.66~60 II	0.66kV	400/5	5VA	0.5	60×10mm ²	1~2	1
		500/5	10VA	0.5			
		600/5	10VA	0.5			
		750/5	10VA	0.5			
		800/5	10VA	0.5			
		1000/5	15VA	0.2			
		1200/5	20VA	0.2			
		1500/5	20VA	0.2			
		2000/5	40VA	0.2			
HZBH0.66~100 II	0.66kV	500/5	10VA	0.5	100×10mm ²	1~2	1
		600/5	10VA	0.5			
		750/5	10VA	0.5			
		800/5	10VA	0.5			
		1000/5	15VA	0.2			
		1200/5	20VA	0.2			
		1500/5	20VA	0.2			
		2000/5	40VA	0.2			
		2500/5	40VA	0.2			
		3000/5	40VA	0.2			
		4000/5	40VA	0.2			
HZBH0.66~120 II	0.66kV	800/5	10VA	0.5	120×10mm ²	1~3	1
		1000/5	15VA	0.2			
		1200/5	20VA	0.2			
		1500/5	20VA	0.2			
		2000/5	40VA	0.2			
		2500/5	40VA	0.2			
		3000/5	40VA	0.2			
		4000/5	40VA	0.2			
		5000/5	40VA	0.2			

说明:

使用温度: -40℃~65℃;

贮存温度: -40℃~75℃;

相对湿度: 10%~95%;

海拔高度: ≤3000m;

隔离耐压: AC 3.0KV/min;

隔离: 一次对二次及地。