

HKA—F6系列霍尔电流传感器

(HKA-F6 Hall-effect Current Sensor Series)


HKA-F6 系列霍尔电流传感器的初、次级之间是绝缘的，可用于测量直流、交流和脉冲电流。

(HKA-F6 Series Hall-effect Current Sensor between primary and secondary is insulated, can be used for the measurement of DC, AC and pulse current)

电气参数 (Electrical characteristics)						
	型号 Type	HKA5000 -F6	HKA10000 -F6	HKA20000 -F6	HKA30000 -F6	A
I _{pn}	额定输入电流 Rated input	5000	10000	20000	30000	A
I _{pm}	测量电流范围 Measuring range	6000	12000	24000	36000	A
V _{out}	输出电压 Rated output voltage	4				V
V _o	零电压失调 Zero offset voltage	< ±25				mV
V _{OM}	磁失调电压 Magnetic offset voltage	≤ ±25				mV
R _L	负载电阻 Load resistance	≥ 10				K Ω
V _c	电源电压 Supply voltage	±15 ±5%				V
I _c	静态功耗 Current consumption	≤ 50				mA
V _{ot}	零点温漂 Thermal drift of V _o	≤ ±0.5				mV/°C
F	带宽 Frequency bandwidth(-3dB)	DC~5				KHz
ε _G	精度 Accuracy	±1				%
ε _L	线性度 Linearity	±1				%
T _r	响应时间 Response time	≤ 7				μ S
V _d	绝缘电压 Insulation voltage	6				KV
T _a	工作温度 Ambient operating temperature	-40~+85				°C
T _s	储存温度 Ambient storage temperature	-40~+125				°C
M	重量 mass	6200				g

标准 Standards	EN50178\IEC61010-1\UL94-Vo\ROHS	
--------------	---------------------------------	--

机械参数 Dimensions (mm)

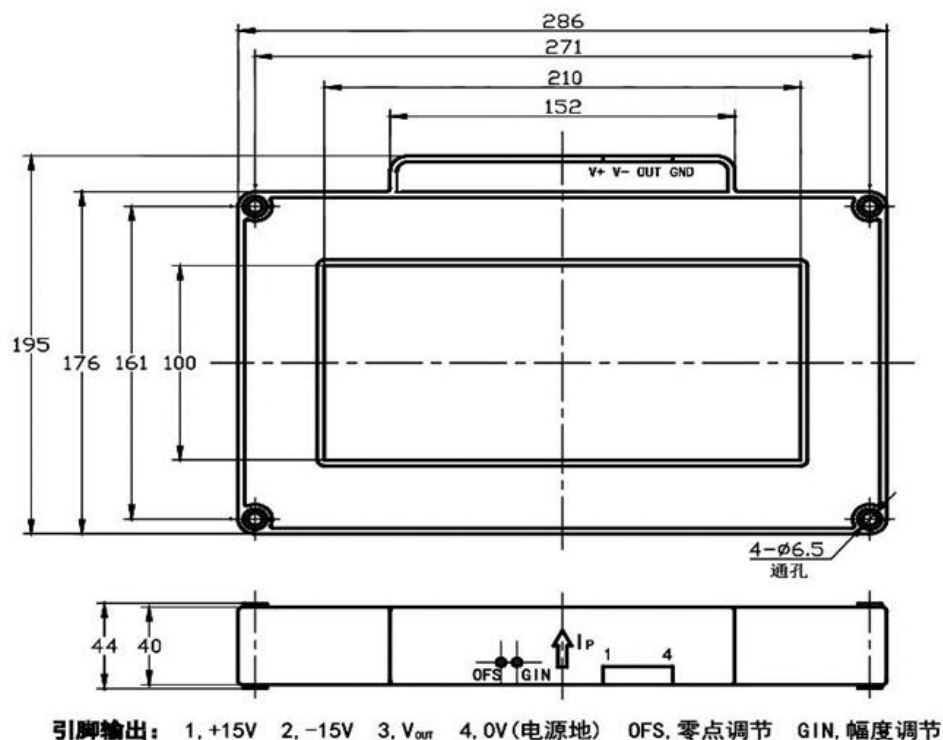

引脚说明: 1, +15V 2, -15V 3, V_{out} 4, 0V

端子标准: 3.52mm, 4pin 接线式连接器 (可选电缆输出)

OFS, 零点调节 GIN, 幅度调节

使用说明 Remarks

- 1、应用: 通讯电源、不间断电源UPS、斩波器、电化学、整流、电源监测、电焊机、变频、开关电源、电池监测、电动机监测等领域。Application: communication power supply, uninterruptible power supply UPS chopper, electrochemical, rectifier, power monitoring, welding machines, inverter, switching power supply, battery monitoring, motor monitoring fields.
- 2、传感器的输出幅度可根据用户需要进行适当调节。The amplitude of the output of the sensor can be appropriately adjusted according to user needs.
- 3、可按用户需求定制不同额定输入电流和输出电压的传感器。Custom different rated input current and the output voltage of the sensor.