

HSA—SPV系列霍尔电流传感器

(HSA-SPV Hall-effect Current Sensor Series)


HSA-SPV 系列霍尔电流传感器的初、次级之间是绝缘的，可用于测量直流、交流和脉冲电流。

(HSA-SPV Series Hall-effect Current Sensor between primary and secondary is insulated, can be used for the measurement of DC, AC and pulse current)

电气参数 (Electrical characteristics)					
	型号 Type	HSA5-SPV	HSA10-SPV	HSA25-SPV	
I _{pn}	额定输入电流 Rated input	5	10	25	A
I _{pm}	测量电流范围 Measuring range	15	30	75	A
R _m	内接测量电阻 Measuring resistance	100	100	37.5	Ω
K _N	匝比 Turns ratio	2: 1000	1: 1000	1: 1500	
	输入管脚尺寸 Input pin size	φ 0.8	φ 1.0	φ 1.4	mm
V _{out}	输出电压 Rated output voltage	2.5 ± 0.625			V
V _o	零电压失调 Zero offset voltage	2.5 ± 1%			V
V _c	电源电压 Supply voltage	+5 ± 5%			V
I _c	静态功耗 Current consumption	≤ 25			mA
I _{ot}	零点温漂 Thermal drift of I _o	≤ 0.5			mV/°C
F	带宽 Frequency bandwidth(-3dB)	DC~150			KHz
ε _G	精度 Accuracy	± 0.7			%
ε _L	线性度 Linearity	± 0.2			%
di/dt	跟随精度 Accurately followed	> 50			A/μS
Tr	响应时间 Response time	≤ 1			μS
V _d	绝缘电压 Insulation voltage	2.5			KV

Ta	工作温度 Ambient operating temperature	-40~+85	℃
Ts	储存温度 Ambient storage temperature	-40~+125	℃
M	重量 mass	15	g
	标准 Standards	EN50178\IEC61010-1\UL94-Vo\ROHS	

机械参数 Dimensions (mm)

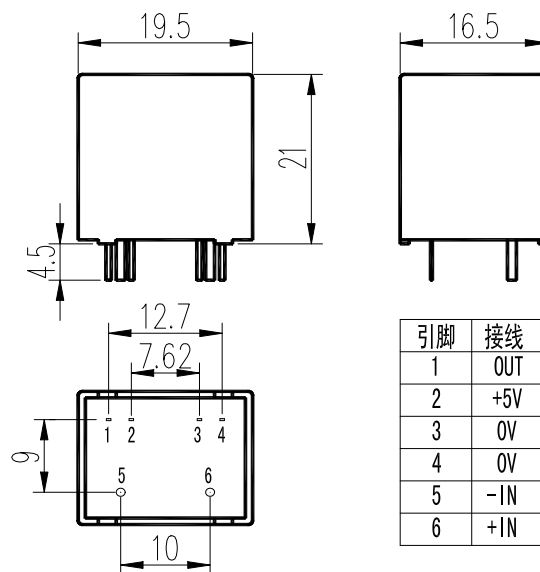

功能管脚：4个（1234），尺寸为 0.25*0.5mm

使用说明 Remarks

- 1、应用：通讯电源、不间断电源UPS、斩波器、电化学、整流、电源监测、电焊机、变频、开关电源、电池监测、电动机监测等领域。Application: communication power supply, uninterruptible power supply UPS chopper, electrochemical, rectifier, power monitoring, welding machines, inverter, switching power supply, battery monitoring, motor monitoring fields.
- 2、传感器的输出幅度可根据用户需要进行适当调节。The amplitude of the output of the sensor can be appropriately adjusted according to user needs.
- 3、可按用户需求定制不同额定输入电流和输出电压的传感器。Custom different rated input current and the output voltage of the sensor.